

Protocol3 Clock Settings

Steps To Change the Clock Setting

- First turn off the Recorder function
- Enter Configuration Menu
- Enter Clock Configuration
- Adjust settings
- Return to the Select A Mode screen


Turn off Recorder function

- First press the Stop key to stop any running process
- Enter the Main Menu by pressing the up arrow and the enter key at the same time




Turn off Recorder function

- Press the down arrow to highlight Recorder Control
- Press Enter

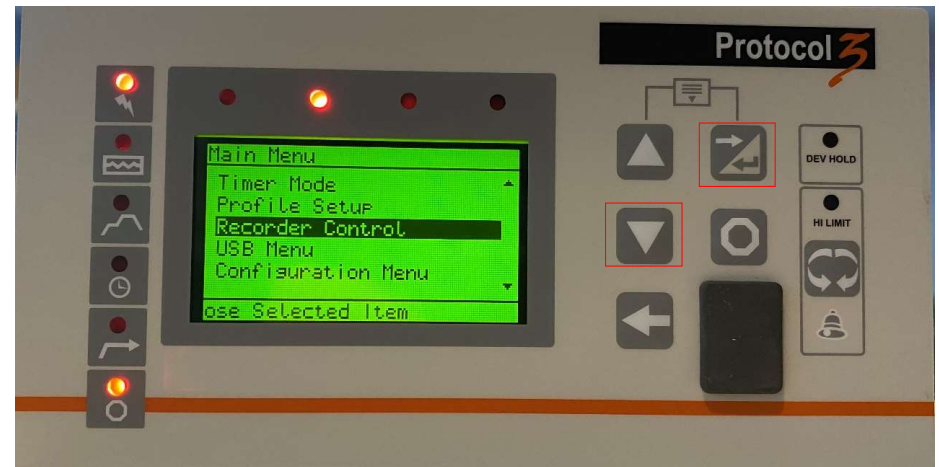


Turn off Recorder function

- Press up arrow to enter the Unlock Code of 0010
- Press Enter

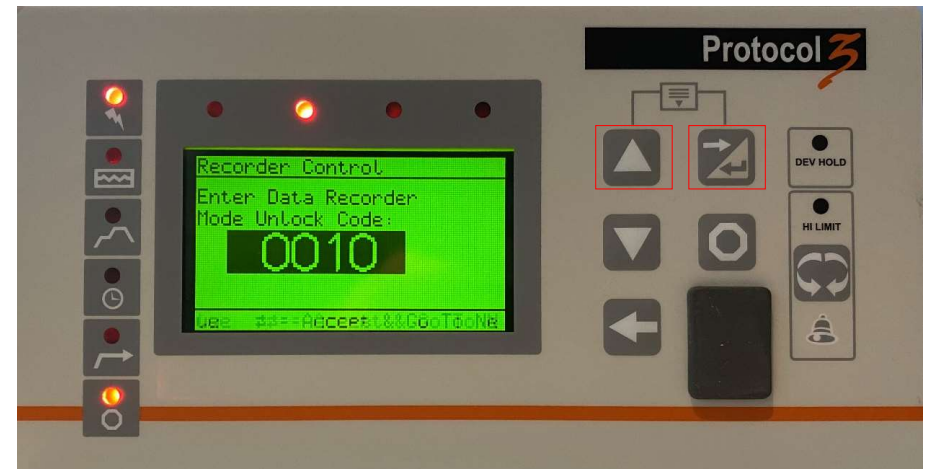

Turn off Recorder function

- Select Stop Recording
- Press Enter

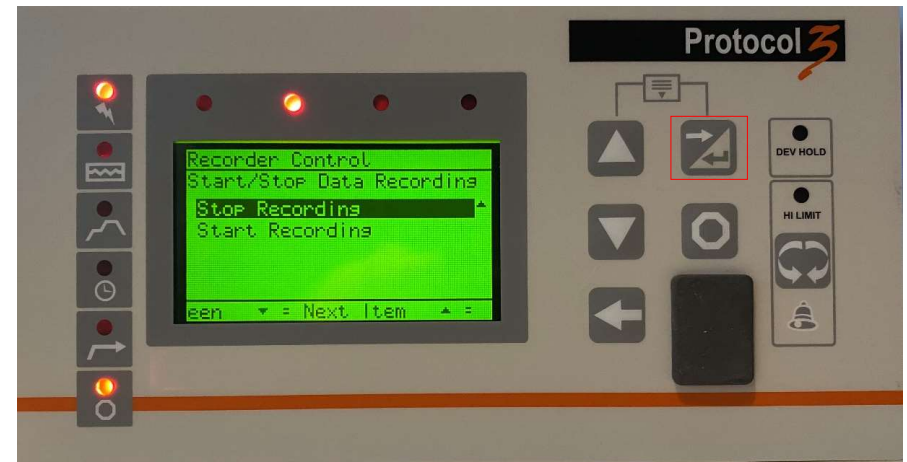


Turn off Recorder function

- Return to the Main Menu by pressing and holding Enter key and while holding the Enter Key, press the Up-arrow key once



Enter Configuration Menu

- From the Main Menu, use the Arrow keys to select Configuration Menu
- Press Enter Key

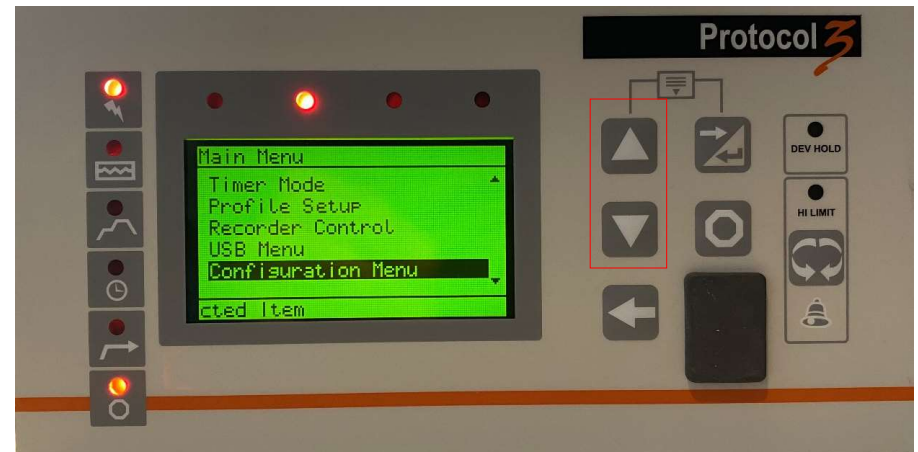


Enter Configuration Menu

- Press up arrow to enter the Unlock Code of 0010
- Press Enter




Enter Clock Configuration

- From the Configuration Menu, use the Arrow keys to select Clock Configuration
- Press Enter Key

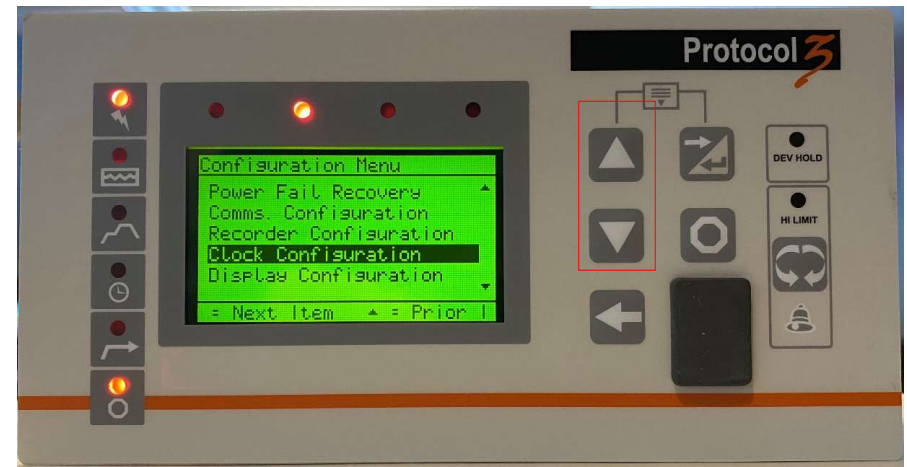


Adjust Settings

- Parameters in this menu are:
 - Date Format
 - Set Date
 - Set Day Of The Week
 - Set Time
- Adjust settings with the Arrow keys, and press the Enter key to save the change and advance to the next parameter

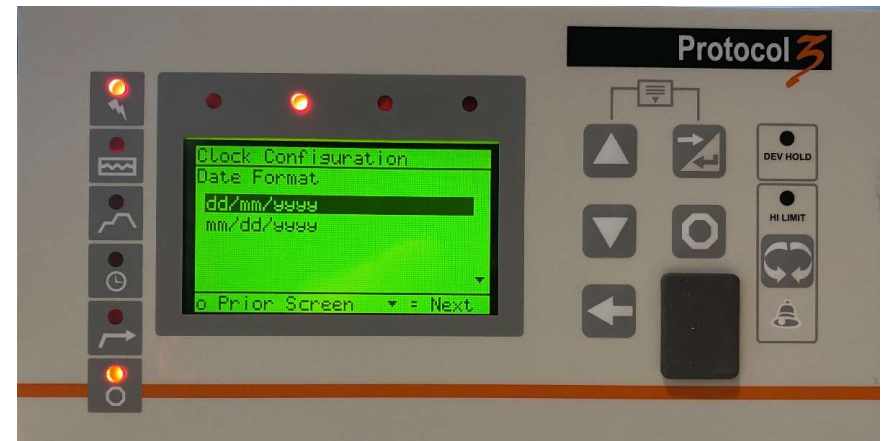


Return to the Select A Mode screen

- Return to the Select A Mode screen by pressing and holding Enter key and while holding the Enter Key, press the Up-arrow key three times. See video

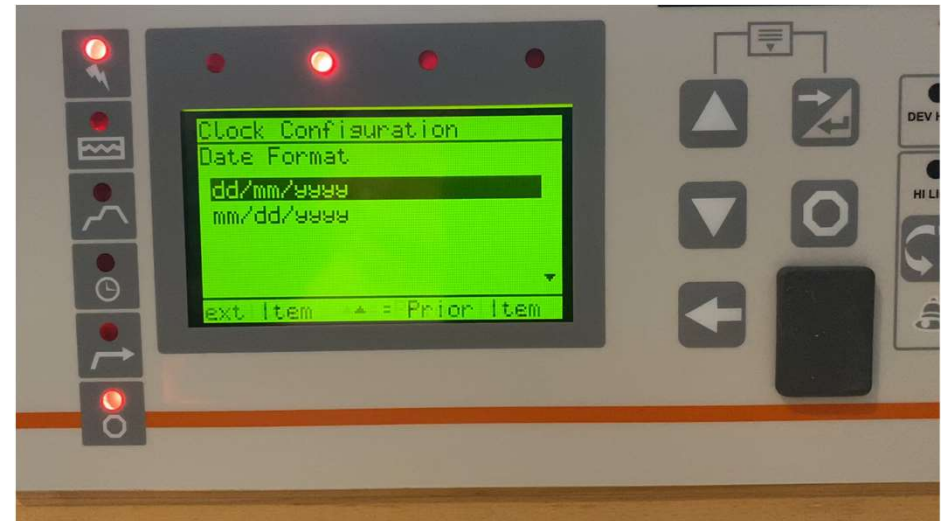

**MPM | Camalot | Electrovert
Vitronics Soltec | Despatch**



***Together in
Process Perfection***

Electronic Assembly Equipment

||TW|EAE